


# PRODUCT BULLETIN

#18201

## CW-P Series Plenum Permanent Installation Speaker Cables

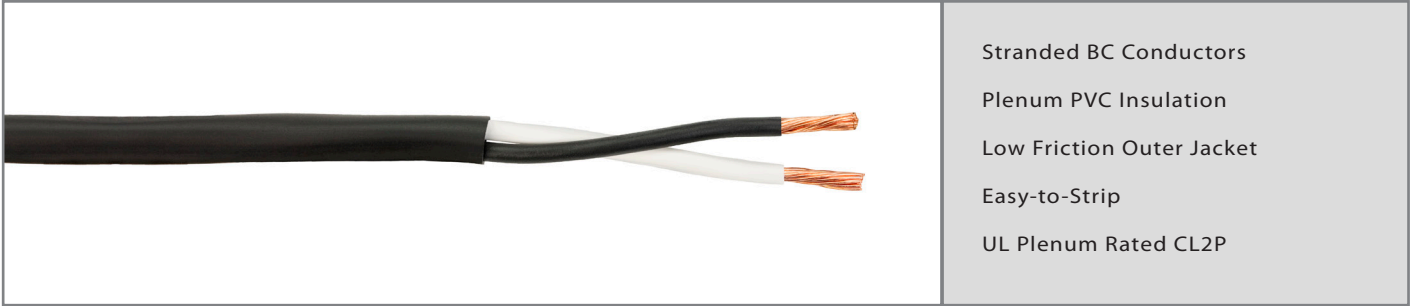


- Stranded BC Conductors
- Plenum PVC Insulation
- Low Friction Outer Jacket
- Easy-to-Strip
- UL Plenum Rated CL2P

### Part Number Overview

Part Number: **CW-P Series** (see below for variations)  
 Description: Plenum Permanent Installation Speaker Cables

### Materials

CONDUCTORS	(2) Stranded BC (see below for gage types)
INSULATION	Plenum PVC, .015" (white & black)
JACKET	Plenum PVC
COLOR	Black

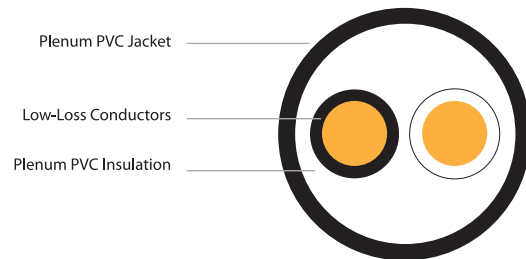

### Performance Characteristics

UL Rating	Temperature Range
CL2P	-0°C to 75°C

### Product Variations

Part Number	Conductor Gage	DC Resistance	Overall Diameter	Bend Radius	Weight
<b>CW1202P</b>	12AWG (19x25)	1.8 Ω/Mft	.250"	2.5"	61 lbs/Mft
<b>CW1402P</b>	14AWG (19x27)	2.8 Ω/Mft	.210"	2.1"	39 lbs/Mft
<b>CW1602P</b>	16AWG (19x29)	4.5 Ω/Mft	.182"	1.8"	28 lbs/Mft
<b>CW1802P</b>	18AWG (19x30)	6.0 Ω/Mft	.166"	1.6"	20 lbs/Mft

The CW-P series is an easy-to-install, commercial grade speaker cable for permanent installation in walls or conduit. Built with large gage copper conductors, the CW-P series minimizes power loss and attenuation through the cable. The outer jacket is extruded from a flexible PVC that is easy-to-strip and has a low friction finish that is easy to pull through conduit. UL rated type CL2P, the CW-P series can be installed variety of environments.